

2018
le
LASTre
XXL6mm

INDICE

index

2018

le
Lastire
XXL6mm

Calacatta	2
Statuario	4
Pietra Grey	6
Sahara Noir	8
Corton	10
Living	12
Amazon	14

Caratteristiche tecniche e imballi	16
Packaging Technical features and packaging	

CALACATTA

naturale&lucidato 6mm

120x260
Rettificato | Rectified

Gres porcellanato smaltato.
Glazed porcelain gres.



naturale

NOT POLISHED
6 faces
120x260 | 48"x102"
H10

lucidato

POLISHED
6 faces
120x260 | 48"x102"
H18

faces

STATUARIO

naturale&lucidato 6mm

120x260
Rettificato | Rectified

Gres porcellanato smaltato.
Glazed porcelain gres.



naturale

NOT POLISHED
6 faces
120x260 | 48"x102"
H10

lucidato

POLISHED
6 faces
120x260 | 48"x102"
H18

faces

PIETRA GREY

naturale&lucidato 6mm

120x260

Rettificato | Rectified

Gres porcellanato smaltato.
Glazed porcelain gres.



naturale

NOT POLISHED
6 faces
120x260 | 48"x102"
H9

lucidato

POLISHED
6 faces
120x260 | 48"x102"
H17

4 faces

SAHARA NOIR

naturale&lucidato 6mm

120x260

Rettificato | Rectified

Gres porcellanato smaltato.
Glazed porcelain gres.



naturale

NOT POLISHED
6 faces
120x260 | 48"x102"
H12

lucidato

POLISHED
6 faces
120x260 | 48"x102"
H19

4 faces

CORTON

IVORY | GREY

120x260
Rettificato | Rectified

Gres porcellanato smaltato.
Glazed porcelain gres.






LIVING

GREY | PEARL | TAUPE

120x260
Rettificato | Rectified

Gres porcellanato smaltato.
Glazed porcelain gres.

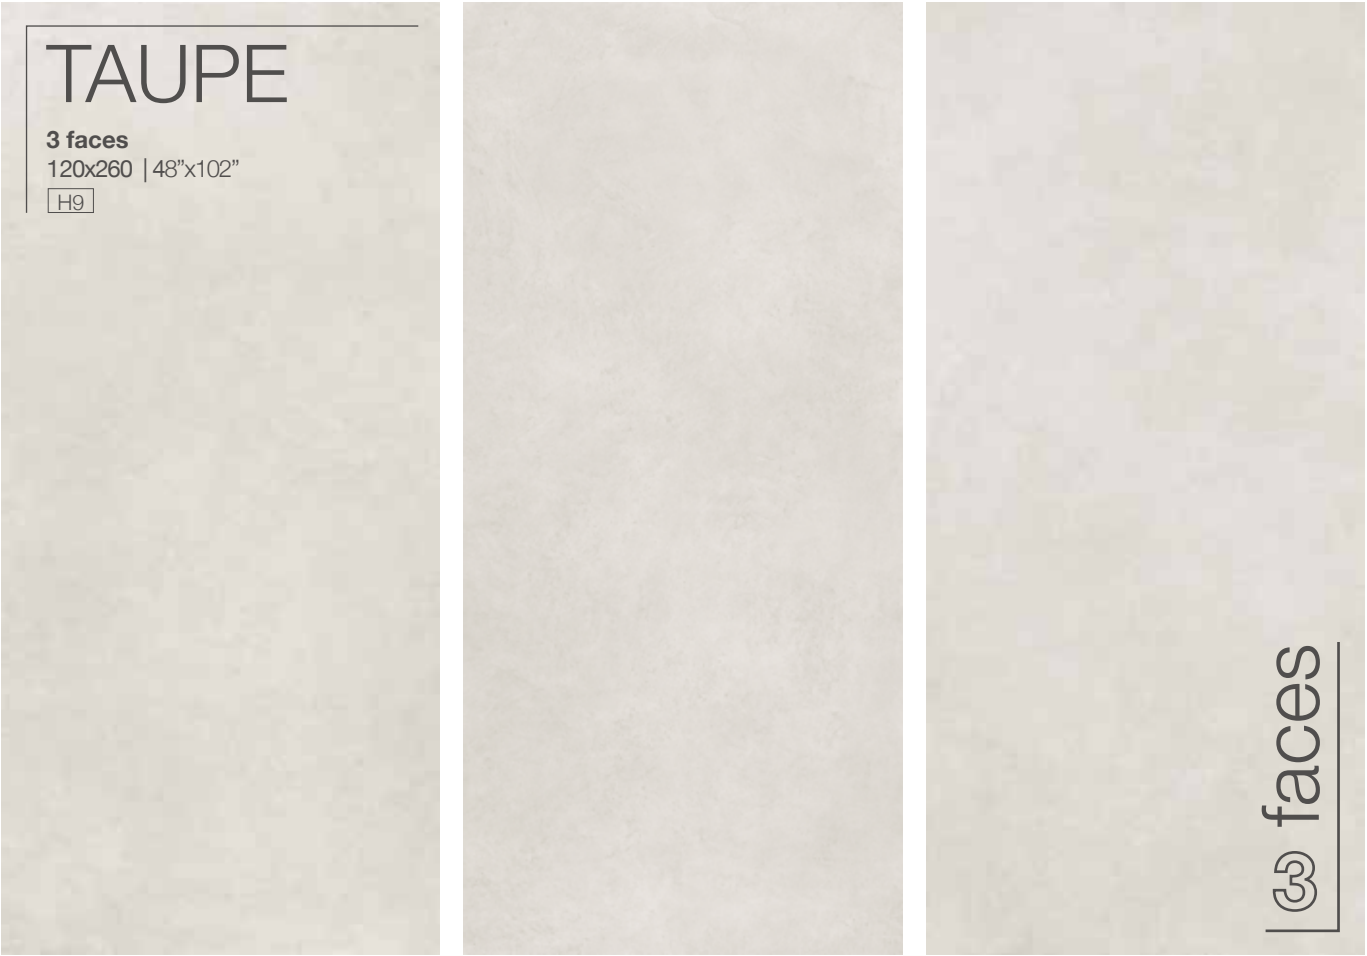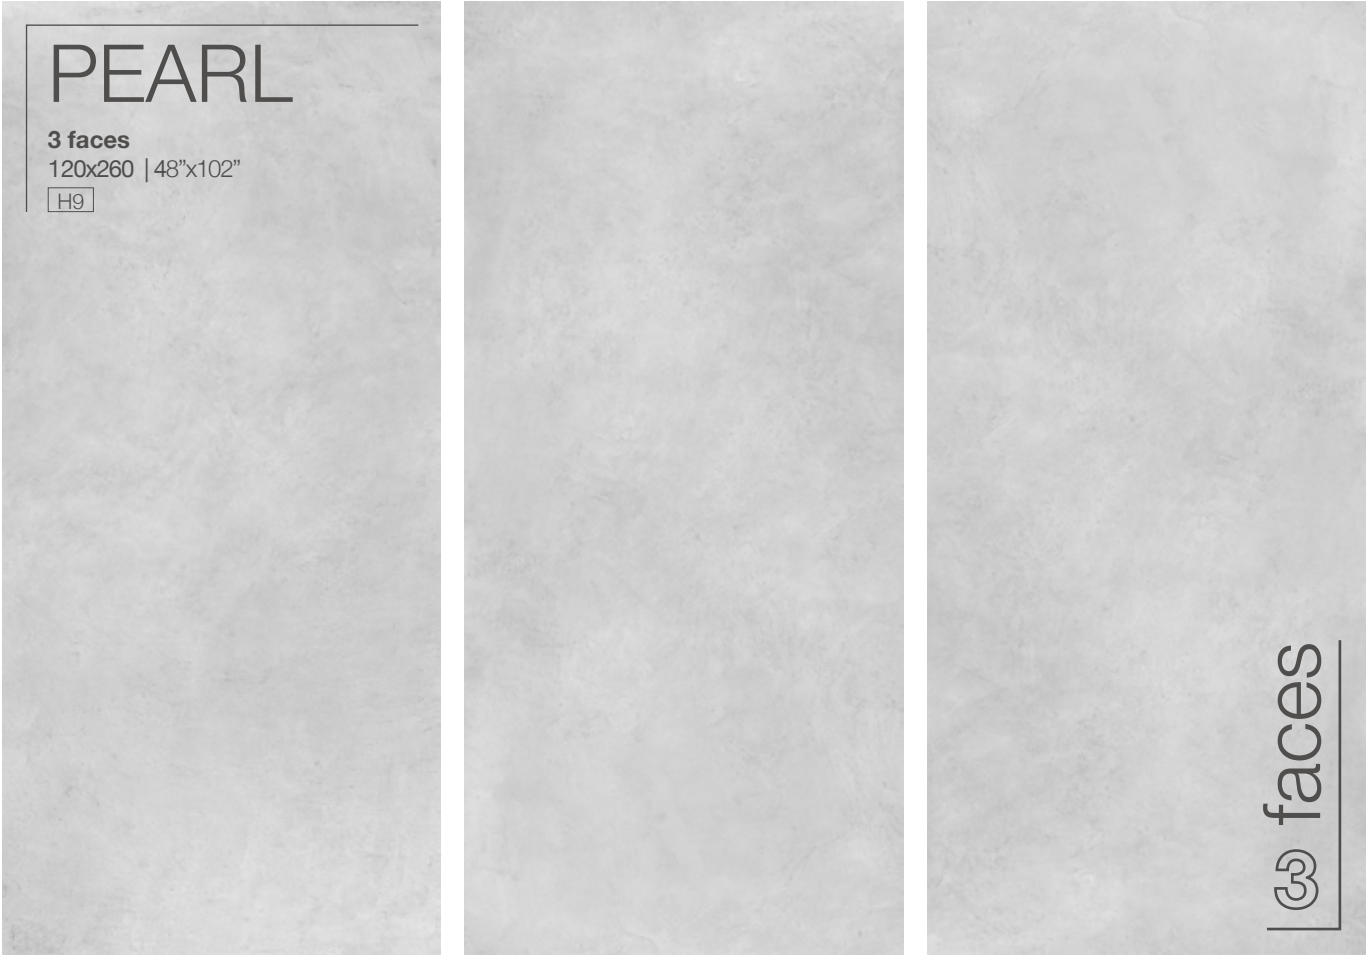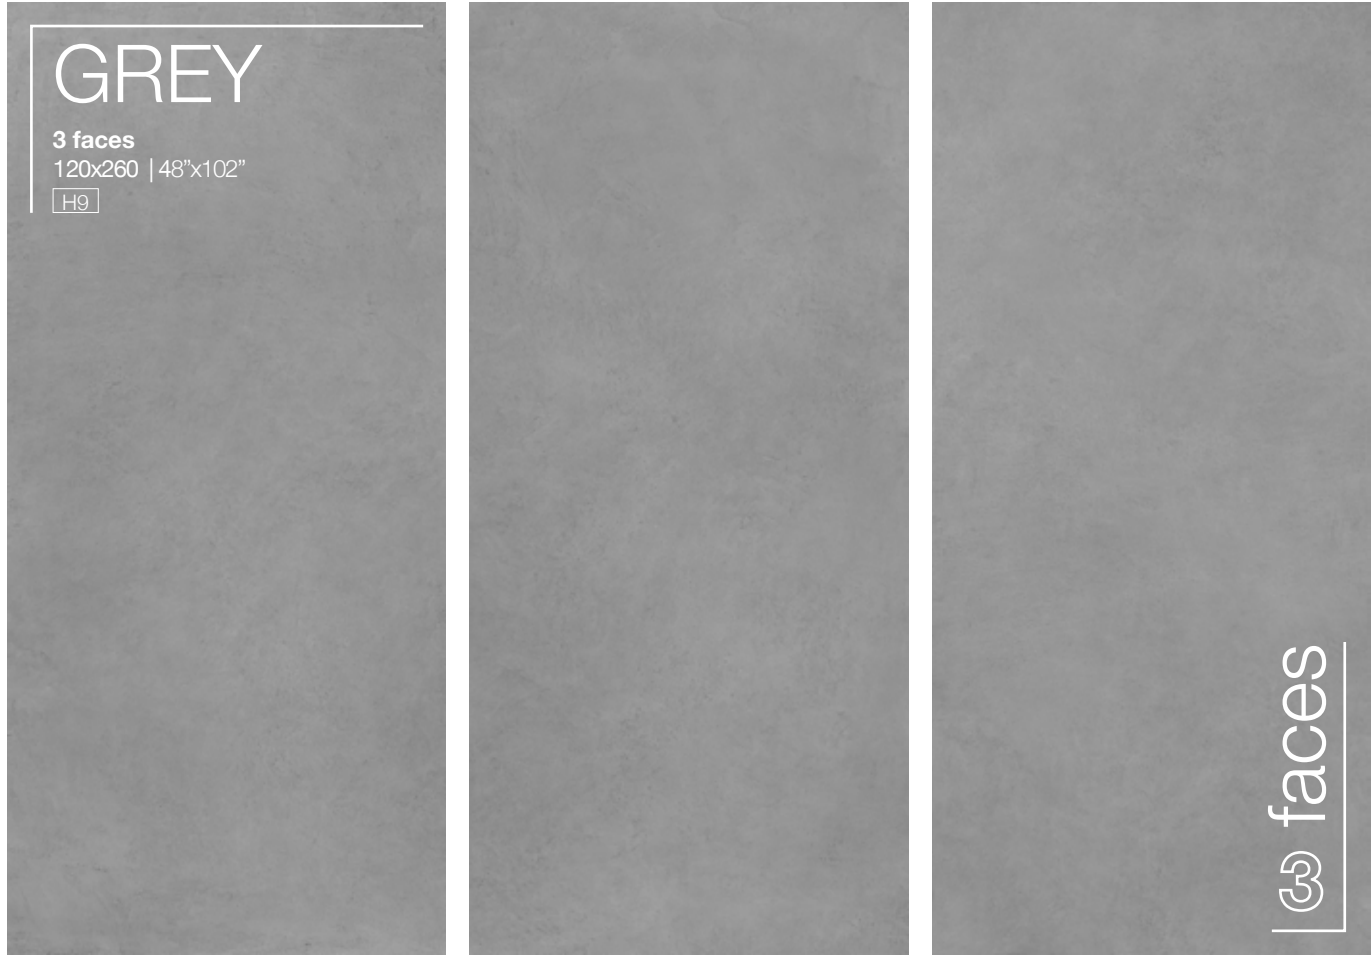

AMAZON

BETULLA | ROVERE

120x260

Rettificato | Rectified

Gres porcellanato smaltato.
Glazed porcelain gres.



BETULLA

2 faces

120x260 | 48"x102"

H9

2 faces

BETULLA

special size

30x260 | 8"x48"

H13

ROVERE

2 faces

120x260 | 48"x102"

H9

2 faces

ROVERE

special size

30x260 | 8"x48"

H12

CARATTERISTICHE TECNICHE

Technical features

	Technical Characteristics	Measurement Method	Proxima average value	
SURFACE DIMENSIONS AND QUALITY	LENGTH & WIDTH Acceptable average deviation (%) of the actual size of each tile from the manufacturing size.	EN ISO 10545-2	Max. deviation on the side ±0.5 mm	
	ORTOGONALITY	EN ISO 10545-2	± 0,1 %	
	WEIGHT	Proxima	15 kg/m2	
	SURFACE QUALITY	ISO 10545-2	Minimum 95% of the tiles tested must be free from visible defects	
PHYSICAL PROPERTIES	WATER ABSORPTION	ISO 10545-3	Average value E= 0.1%	
	MODUL OF RUPTURE (R)	ISO 10545-4	50 N/mm²	
	BREAKING STRENGTH RUPTURE (S)	ISO 10545-4	1.100 N	
	FROST RESISTANCE	ISO 10545-12	RESISTANT	
	THERMAL SHOCK RESISTANCE	ISO 10545-9	RESISTANT	
	DEEP ABRASION RESISTANCE	ISO 10545-6	max 175 mm3	
CHEMICAL PROPERTIES	RESISTANCE TO HOUSEHOLD CHEMICALS	ISO 10545-13	NATURAL	POLISHED
			UA.	UB
	RESISTANCE TO HIGH OR LOW CONCENTRATION OF ACIDS OR BASES		ULA UHA	ULB UHB
	RESISTANCE TO STAINING	ISO 10545-14	Class 5	Class 3-4

Imballi | Packaging

FORMATO SIZE	SPESS	PZ/CASSA PCS/CRATE	MQ/CASSA SQM/CRATE	KG/MQ KG / SQM	KG / CASSA KG / CRATE	DIMENS CASSA mm DIMENS CRATE mm
120x260 cm	6mm	20	62,40	15,00	1.000,00	2750 x 1370 x 290

CARICO IN CONTAINERS LOADING IN CONTAINERS		X20'FCL	X40'FC	DIMENS CASSA mm TOTAL CRATE SIZE mm
CASSE CARICABILI / CRATES PER LOADING	NR	14	28	2750 x 1370 x 290
LASTRE CARICABILI/ SLABS PER LOADING	NR	280	560	
MQ CARICABILI / SQM PER LOADING	SQM	873,6	1.747,20	
PESO TOTALE - LASTRE+IMBALLO TOTAL WEIGHT - SLABS+PACKING	KG	14.000,00	28.000,00	

L'Azienda si riserva la facoltà di modificare in qualunque momento le informazioni e le caratteristiche tecniche illustrate nel presente catalogo, che non sono comunque da ritenersi legalmente vincolanti. Pesì, colori e misure possono subire variazioni tipiche del particolare processo di cottura del materiale ceramico. I colori e le caratteristiche estetiche dei prodotti sono quanto più possibile vicini a quelli reali, nei limiti consentiti dai processi di stampa. Tutti i formati si intendono nominali.

The Company reserves the right, at any time and without prior notice, to change the information and technical characteristics given in this catalogue, none of which are to be considered legally binding. Weights, colours and dimensions are subject to the normal variations resulting from the ceramic ring process. Within the limits of printed material, the colours and aesthetic features of the products illustrated correspond as closely as possible to those of the actual products. All sizes are to be considered nominal.



ANM s.r.l.
Via Vita di Vita, 2
47893 Cailungo - R.S.M.
Tel. 0549.903200
Fax 0549.906660
C.O.E. SM07811

www.anmdesign.sm